


PATCONTROL PCS-12 AIRBAG

Checks airbag dimensions





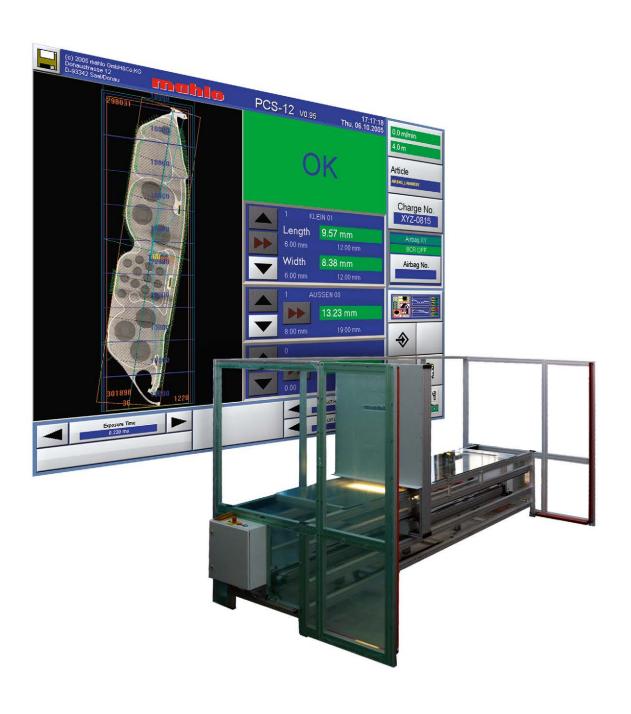



















PATCONTROL PCS-12 AIRBAG

Innovative concepts for the airbag industry



Applications

Modern production engineering demands high standards, extreme precision and reliability from suppliers to the car industry, particularly those from the safety-related sector.

Constant supervision of components is an indispensable prerequisite for perfect products. This applies in a particular way to the most diverse types of airbag used for safeguarding the driver and passengers seated in motor vehicles.

The PCS Airbag-concept has satisfied these requirements most successfully, and has helped promote a greater degree of assurance for both the airbag manufacturers and, above all, the beneficiaries of an emergency release.

Product-highlights

- ✓ Stationary single measurement and on-line control possible
- ✓ Single measurement in up to 5 seconds per airbag
- ✓ The very latest high-tech line cameras
- ✓ User friendly
- ✓ Comprehensive operating software with corresponding visualization

MAHLO SUPPORT AND CUSTOMER SERVICE

The Mahlo support and service team is at your disposal with expert help whenever you need it:

Online-Support:

SERVICE@MAHLO.COM

Support-Hotline:

+49-(0)180-50 62 456



Principle of operation

The assembly's hardware comprises the very latest in components already well-proven over the years on other applications associated with Mahlo camera-technology:

- Measuring table with mobile camera / lighting unit,
- One or two line cameras,
- Back and, or reflex lighting facility,
- Control panel with evaluator, and
- Control and display terminal

Visualization and control conform to the well-known standards of the latest generation systems. Software is subject to a continuous process of development.



Customer benefits

- ✓ Uninterrupted monitoring and logging of actual product quality
- ✓ Precise pass / fail-evaluation
- ✓ Significant increased productivity
- ✓ Optimized quality assurance
- ✓ Optimized process repeatability
- ✓ Short payback times

PATCONTROL AIRBAG









VISUALIZATION


EVERYTHING AT A GLANCE

Product-highlights

- ✓ Precise and descriptive display of defects
- ✓ Clear pass / fail-alarm
- ✓ Menu-controlled service settings
- ✓ Password protectionunauthorized users are denied access to the program
- ✓ Integrated audio response

Customer benefits

- ✓ Continuous inspection, classification and logging
- ✓ Storable recipes for various types of airbags
- ✓ Menu prompt in all the usual languages
- ✓ Ergonomic user prompt
- ✓ Easy to operate

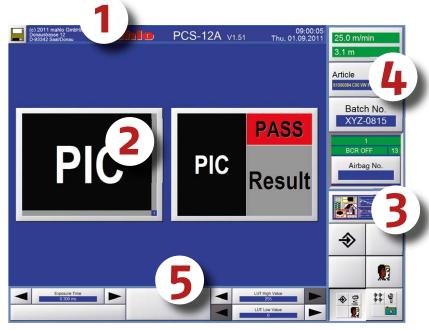

Main display

The user interface is divided into five sections:

1. Title line:

General information (including alarm bar)

2. Display area:

Selectable screen pages (display forms)

3. Selection block:

Navigation within the program

4. Vertical block:

Touch buttons for main options

5. Horizontal block:

Touch buttons for basic functions and sub-options



The two distinct PCS Airbag applications:

- 1. On-line monitoring of airbags prior to separation from a continuous web. Measurement of the width of the web, pattern repeat, and the length and depth of the visible airbag contours.
- 2.Stationary check on a measuring table of the accuracy to size of the cut-out airbags with the aid of customer-specified, fixed test points, and thus an as sessment of the soundness of the individual airbags, are supplemented by measure ment of thickness.




PCS Airbag camera system



Airbag check with back lighting



Airbag check with reflex lighting

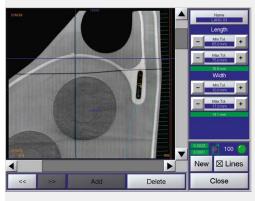

Configuration of measuring tolerances



Adjusting the edge locator



The scanner has registered a fault on the patch

PATCONTROL AIRBAG











FUNCTION

ON-LINE AND STATIONARY



The airbag has passed the test.

Online OPW check

In the course of a finishing and coating process, an on-line check of pattern repeat is required for multilaterally woven OPW airbags (OPW = one piece woven). In doing so, the repeat dimension in length and width is allotted separately to each individual airbag. Consequently, it is possible to monitor continuously positive and negative linear variations during the process. The data on each individual airbag are filed and logged.

Pass / Fail- Assessment

With jacquard-woven, double-walled airbags with woven-interlocked contours, a set of criteria determines whether or not they comply unreservedly with specified standards.

The PCS Airbag establishes adherence to these criteria in terms of given standards such as

- Accuracy to size
- Soundness
- Completeness

If the given standards are not or only partially adhered to, an assessment is triggered which, in effect, can be narrowed down to a Pass / Fail criterion. This constitutes an objective appraisal of an airbag's suitability for installation in motor vehicles, or rejection. Comprehensive documentation is available in various forms to cover eventual accountability.







TECHNISCHE DATEN | PATCONTROL PCS AIRBAG

Unit	Patcontrol PCS Airbag
Power supply	230 V, 50/60 Hz
Camera	2048 pixel, lens with fixed length of 35 mm
Lighting	Reflex / back lighting
Scann time	5 - 10 s
Max. product length	3600 mm
Max. product width	800 mm

Dimensions

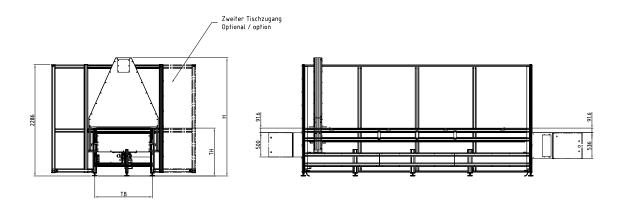

PATCONTROL PCS Airbag

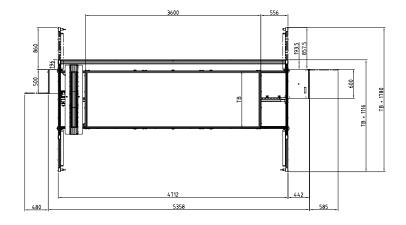



Monitoring and control systems, automation:

MAHLO® GUARANTEES QUALITY. WORLDWIDE, IN YOUR VICINITY.

Best-possible technical support and transfer of know-how are written in capital letters at Mahlo[®]. Thanks to an international network of agencies and service centres, customers have at their disposal competent support worldwide. We are there for you 365 days a year, 24 hours a day. Just get in touch with us!

- ✓ Over 40 service centres worldwide
- ✓ Service partners in over 100 countries
- ✓ Direct service and supply of spare parts within 24 hours
- ✓ Remote diagnostic system
- ✓ Service-hotline: +49-180-5062456





Mahlo GmbH + Co. KG Germany

Donaustr. 12, 93342 Saal/Donau

Tel.: +49-9441-601-0 Fax: +49-9441-601-102 info@mahlo.com

Mahlo Ouest S.R.L. Belgium

Quartum Center Hütte 79 – Bte 10 4700 Eupen

Tel.: +32-87-59-69-00 Fax: +32-87-59-69-09 mahlo.ouest@mahlo.com

Mahlo Italia S.R.L. Italy

Via Fiume 62, 21020 Daverio Tel.: +39-0332-94-95-58 Fax: +39-0332-94-85-86 mahlo.italia@mahlo.com

Mahlo España S.L. Spain

Calle Luxemburgo nº 4 08303 Mataro (Barcelona) Tel.: +34-938-640-549 mahlo.espana@mahlo.com

Mahlo America Inc. USA

P.O. Box 2825, Spartanburg, S.C. 29304

Tel.: +1-864-576-62-88

Fax: +1-864-576-00-09

mahlo.america@mahlo.com



