


Straightening Concept

PATCONTROL PCS-12A/RMM


The fusion of camera based pattern recognition with the fastest responding mechanical weft straightener for

- Automatic pattern detection,
- Distortion correction and
- Design-repeat control

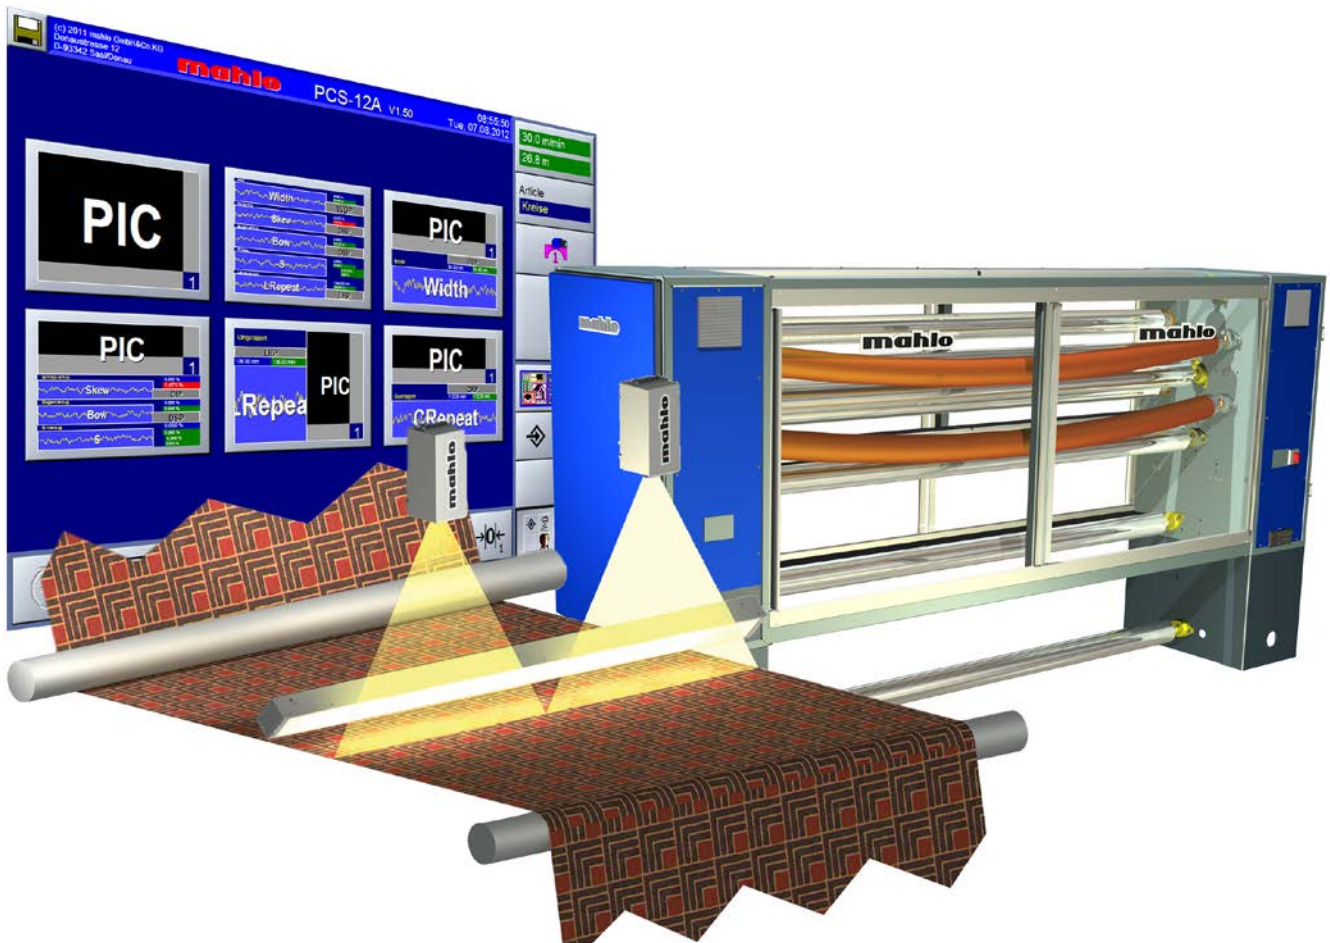

PATCONTROL PCS

Pattern & distortion detection, design-repeat

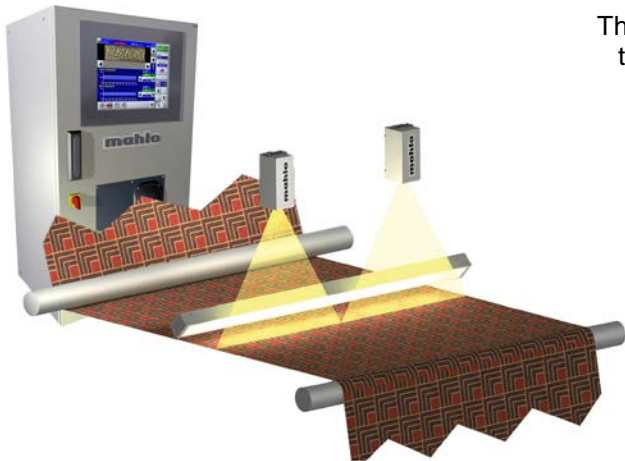

The manufacture and finishing of modern textiles poses problems that were rarely, if ever, encountered previously. It has become far more difficult to turn out straight or realigned patterns. Keeping variables such as design repeat or pattern distortions to within increasingly tighter tolerances is mandatory in the manufacturing, processing and finishing sectors. Distorted patterns especially on lace fabric, carpeting and printed fabric, must be straightened without fail. Bowed or skewed designs impair a product's visual appearance, reduce its usable value and lead to complaints.

Principle of operation

A PATCONTROL is configured in accordance with each customer's specific requirements.

It differs in accordance with the type of software analysis:

- ✓ One software package detects and controls bowed and skewed designs(PDS Pattern Distortion System)
- ✓ Another software package monitors and controls design repeat (PRS Pattern Repeat System)

The system registers the lie of the pattern by line cameras – the number dependent on repeat size and width of the product – monitors design repeat automatically and continuously, measures the width of the material, and realigns the pattern with the help of an associated straightening machine.

The system detects the repeat length and controls automatically the overfeed setting on the stenter. A clever algorithmic feed forward controller ensures outstanding results. Even with brief variations in repeat length, the overfeed setting is immediately adjusted to the necessary value as soon as the product arrives at the stenter in-feed. By automatically rechecking the result at the delivery end, the PATCONTROL helps to ensure a very stable repeat length on the product.


In order to project the best possible, computable image of the pattern or fabric structure onto the screen, the line cameras are supported by a special light fitting, the beam of which either penetrates or illuminates the surface of the product. Depending on whether the system is required to compute cross-sheet patterns or motion and carriageway repeat, different algorithmic assessments are employed. These depend in turn on the design itself (e.g. pattern, lines, etc.)

Product highlights

- ✓ Modular assembly
- ✓ Measures repeat and straightens patterns simultaneously
- ✓ The very latest high-tech line cameras
- ✓ Easy to retrofit
- ✓ User-friendly

Customer benefits

- ✓ Uninterrupted monitoring and logging of actual product quality
- ✓ Increased productivity
- ✓ Optimized quality assurance
- ✓ Optimized process repeatability
- ✓ Short payback times
- ✓ Effective also with asymmetric distortions

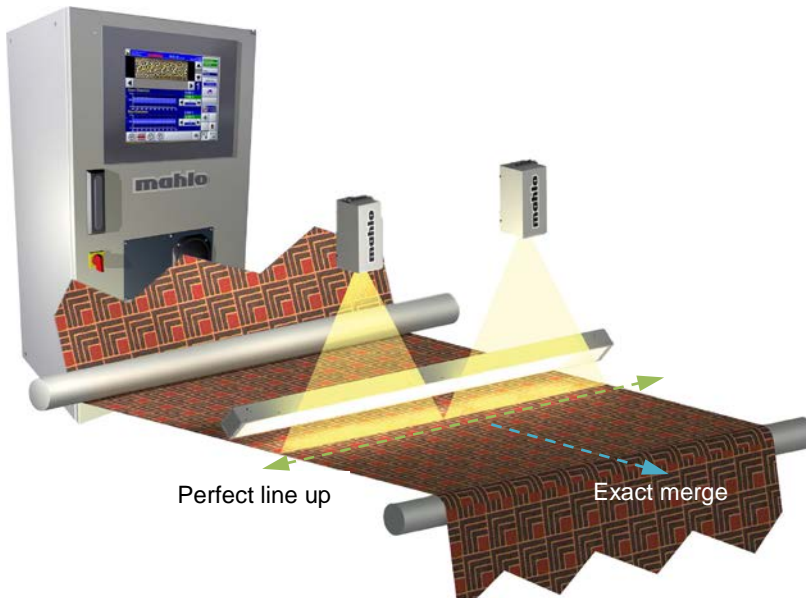

A variable number of line cameras are responsible for the image capturing.



- PRS-software for pattern repeat measurement and control

- PDS-software for pattern distortion measurement and control

ORTHOPAC RMM

Product highlights

- ✓ Ultra-precise realignment of pattern
- ✓ Quick reacting servo-controller
- ✓ Progressive rate of straightening
- ✓ Exceedingly compact construction
- ✓ Low product content
- ✓ Wide variety of optional extras

Customer benefits

- ✓ Maintains tight distortion-related tolerances
- ✓ Helps avoid complaints
- ✓ Improves customer relationships
- ✓ High standards of repeatability
- ✓ Short payback times
- ✓ Highly reliable / long service life

Distortion correction


For the needful correction of the measured pattern distortion, Mahlo can provide the user with an ORTHOPAC RMM straightener, a universal and well-proven system.

Distortions are eliminated with the utmost precision and instantaneously by the interplay between ORTHOPAC RMM and PATCONTROL PCS. The system is easy to operate and robustly constructed.


The exceedingly compact machine is furnished as standard with 3 skew and 2 bow rollers. The unique, stepless controlled actuators for adjustment of the bow and skew rollers ensure the quickest possible and most precise response along with an absolute minimum of maintenance.

The compact, solid construction of the mechanical straightener is capable of handling loads from lowest up to highest. Processing speeds range from 3 m/min to 100 m/min. A variety of options and there especially a sensitive web tension control system suitable for lace and knitted fabrics ensures that the system can be adapted optimally to suit the respective application and types of product likely to be encountered.


A typical installation for lace fabric:

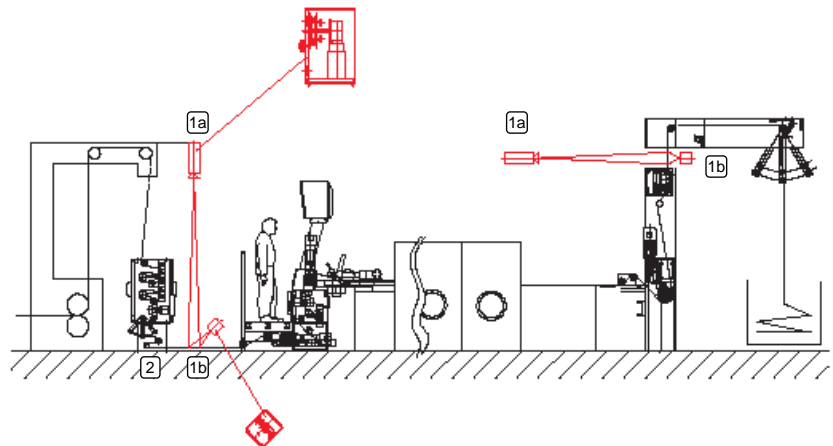

1a Patcontrol PCS-12A Camera 1b Patcontrol PCS-12A Illumination
 2 Orthopac RMM

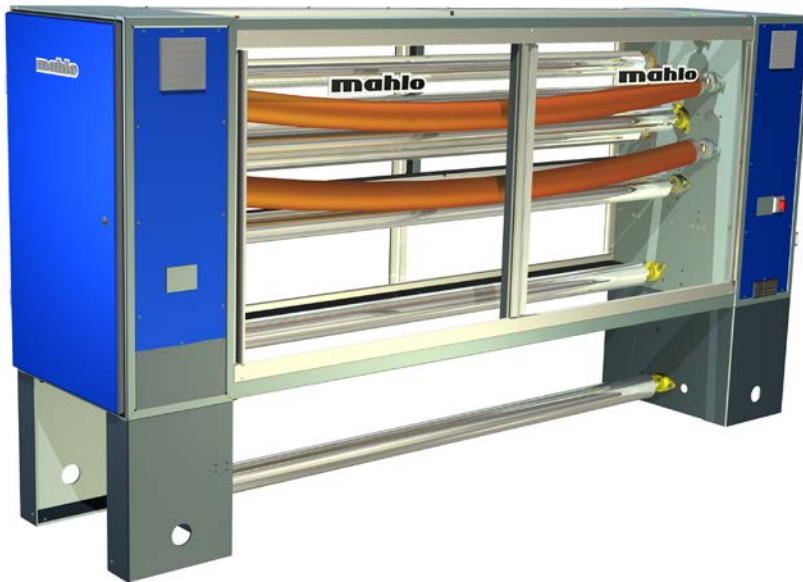

Weft straightener
ORTOPAC RMM, with two
bow and three skew rollers,
web tension control and
spreader rollers available as
optional extras

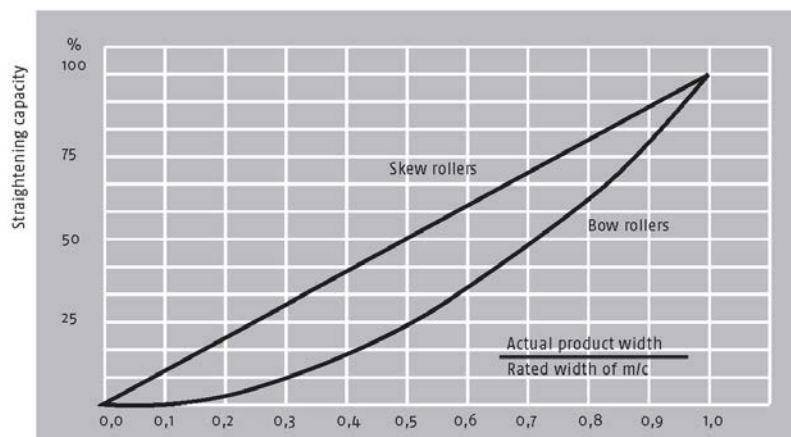


Straightening capacity of skew and bow rollers

Straightening capacity for
skew and bow rollers.



Technical Data

Unit	Patcontrol PCS
Measurement	Optical measurement method by cameras
Max. product width	Up to 5,00 m
Max. line-speed	120 m/min, subject to resolution and lighting
Max. length of camera cable	20 m
Motion sensor	5000 Imp/Rev Dimensions
Subject to product width Power supply	1 ~ 230/115 V AC, 50/60 Hz
Ambient temperature	Max. 50 °C

System mit zwei Kameras
System with two cameras

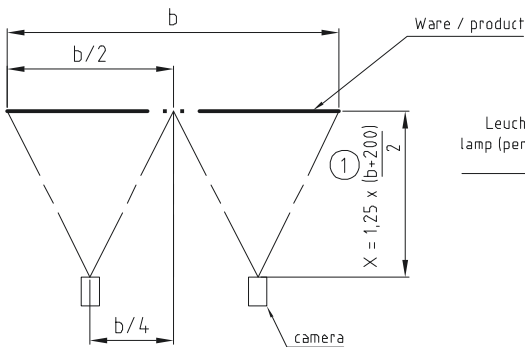


System mit einer Kamera
System with one camera

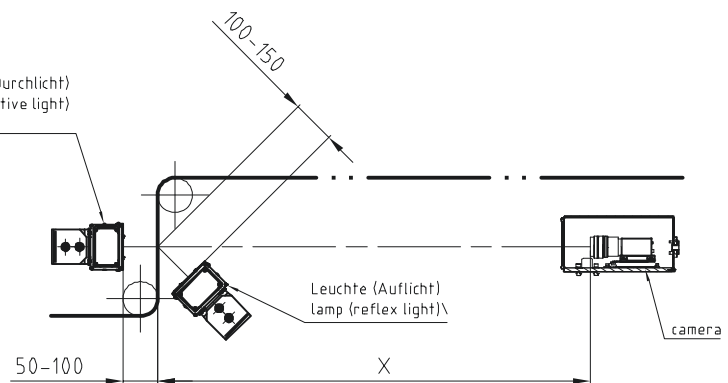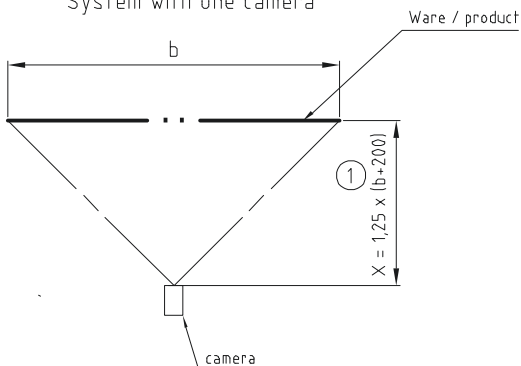

b = Warenbreite / product width

Technical Data

Straightener	Orthopac RMM
Mechanics	3-skew rollers, 2-bow rollers (3rd optional),
Drive mechanism	Hydraulic: controlled by a servo system; Electrical: controlled by frequency-regulated servo motors
Straightening capacity (at w = 1800mm)	Max. skew ± 750 mm; max. bow ± 220 mm (2-bowrollers), (with 3rd bow roller: +50%)
Rate of roller adjustment	bow/skew adjustable, minimum of 4-5 seconds at maximum displacement
Max. fabric width	3400 mm
Max. fabric line-speed	250 m/min (no tension control), 150 m/min (with tension control)
Fabric capacity (basic machine with scanner assembly)	2-skew / 2- bow rollers: ~ 3250 mm, 2-skew / 3-bow rollers: ~ 3600 mm
Dimensions	See diagrams
Weight (at w = 1800mm)	~ 950 kg
Power supplies	3 ~ 380V/50Hz, 3 ~ 400V/50Hz, no neutral; transformer available for other voltages
Power consumption	Max. 6,4 kVA (by fully furnished combi-installations)
Ambient temperature	Max. 45°C (no air conditioner)

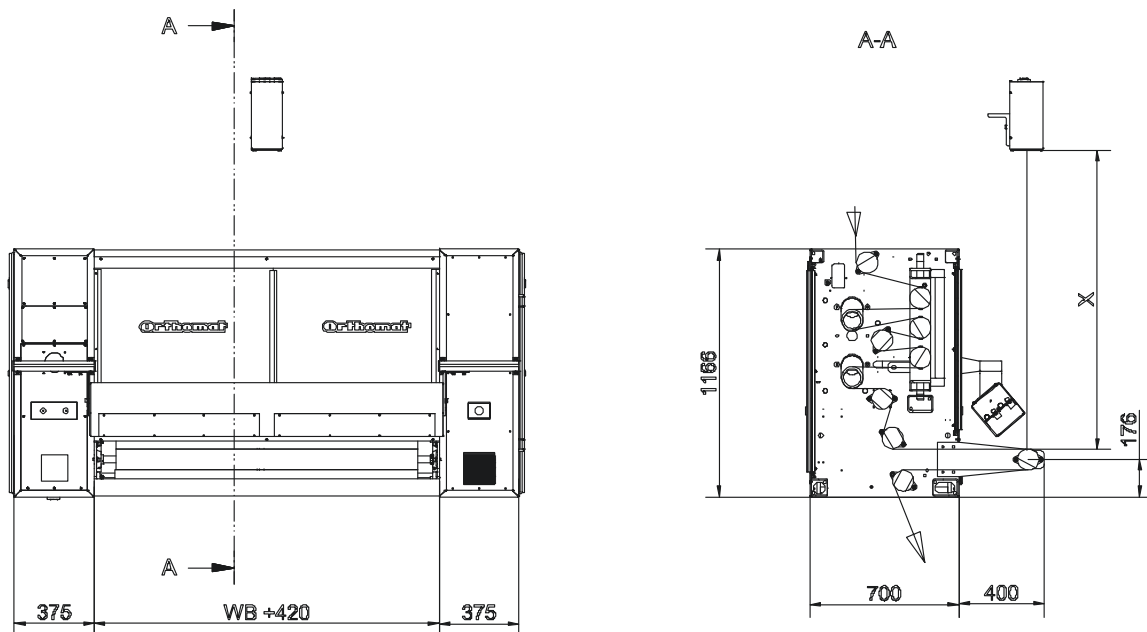

Orthopac RMM with Patcontrol PCS
91-013172

Measuring systems, control systems, automation:

MAHLO[®] ENSURES QUALITY. WHEREVER YOU ARE IN THE WORLD.

Best-possible technical support and transfer of know-how are written in capital letters at Mahlo. Thanks to many international representatives and service stations, customers around the world are never far from expert assistance. 365 days a year, 24 hours a day – we're there for you. Get in touch with us!

- ✓ Over 40 service stations worldwide
- ✓ Direct service and spare parts delivery within 24h
- ✓ Remote diagnostics system
- ✓ Service-Hotline: +49-180-5062456



Overall Managing Director for Mahlo GmbH + Co. KG
and all subsidiaries:

Rainer Mestermann, Dipl. Ing. (FH)

Alois Böckmann, State-certified business economist

Mahlo GmbH & Co. KG Germany

Donaustr. 12, 93342 Saal/Donau
Contact: Rainer Mestermann
Tel.: +49-9441-601-0
Fax: +49-9441-601-102
info@mahlo.com

Mahlo Italia S.R.L. Italy

Via Fiume 62, 21020 Daverio
Contact: Michel Bruni
Tel.: +39-03-32-94-95-58
Fax: +39-03-32-94-85-86
mahlo.italia@mahlo.com

Mahlo America Inc. USA

P.O. Box 2825, Spartanburg, S.C. 29304
Contact: Alan Lavore
Tel.: +1-864-576-62-88
Fax: +1-864-576-00-09
mahlo.america@mahlo.com

Mahlo España S.L. Spain

C/ Santa Margarida, s/n – Nave nº13
Polígono Industrial Riera de Caldes – Boada Vell
E08184 Palau Solità i Plegamans (Barcelona)
Contact: Jordi Grass
Tel.: +34-90-20062-30
Fax: +34-90-20062-40
mahlo.espana@mahlo.com

Mahlo Ouest S.P.R.L. Belgium

Quartum Center
Hütte 79 - Bte 10
4700 Eupen
Contact: Manfred Havenith
Tel.: +32-87-59-69-00
Fax: +32-87-59-69-09
mahlo.ouest@mahlo.com

**Mahlo do Brasil Controle de Processos Ltda.
Brazil**

R. Brigadeiro Faria Lima, 354A - Jd. Santana
Amaericana, SP CEP 13478-210
Contact: Jordi Grass
Tel.: +55-19-3407-7954
mahlo.brazil@mahlo.com

WWW.MAHLO.COM



Quality made
in Germany